



Contact Methods
Mob: (86)18668768846
Tel: (86) 577 68668118
Wechat: zigpac123
Skype: bruce.chan1999
E-mail: bruce@zigpac.com
Whatsapp: +86-18668768846
Telegram: @Zigpacstickers

Company Info
Name: Wenzhou Zigpac Industry Limited
Address: No. 148-152, Building C, Jiangbin
Commercial and Residential Building, Longgang
City, Wenzhou City, Zhejiang 325802, China



YOUR CUSTOM PRINTING & PACKAGING PARTNER FOR SMALL AND MEDIUM BUSINESSES



:

Details

0000: 000000000000,000000000000:000000000000,000000;0000000000000000,00000;000000000000
000;000000000000000000000000000000000000,000000000

本報告係根據本會所屬之「國家安全情報中心」所蒐集之資料，經本會彙編而成，其內容係屬國家安全情報，除供本會參攷外，並供貴會參攷，其內容如有錯誤，請逕向本會提出，以便更正。

[illegible]

11


1. 
2. 
3. 
4. 
5. 
6. 
7. 
8. 

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ ?

- 000000 000000000000,000000000000
- 000000 00000000000000000000
- 0000000000 0000000000,0000000000000000

透明なプラスチックフィルム、例えば Mylar 又は BoPET (BoPET 膜^[1])、又は PET 膜、
 又は PET 膜、又は PET 膜、
 又は PET 膜

[illegible]

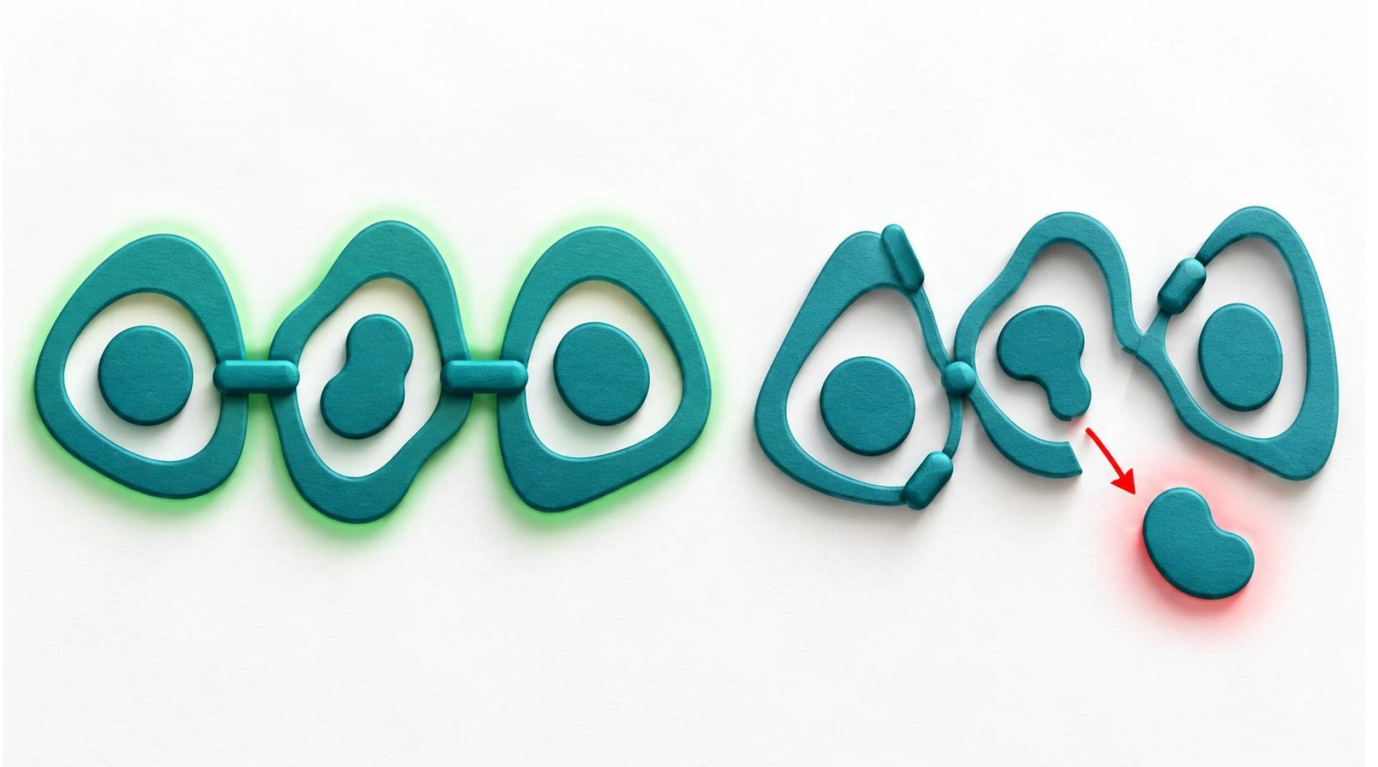

Signage and Markings

Signage and markings are critical for ensuring the safety of all road users. This section provides guidance on the appropriate signage and markings for the proposed project.


- All signs shall be reflective and conform to the standards set forth in the MUTCD.
- All signs shall be placed at least 1/4 in. from the edge of the sign.
- All signs shall be placed at least 6, 8 or 9 ft. from the edge of the sign.
- All signs shall be placed at least 6, 8 or 9 ft. from the edge of the sign.

The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4]. The proposed project shall comply with the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4]. The proposed project shall comply with the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].

Signage and Markings

The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].

1. The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].
2. The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].
3. The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].
4. The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].
5. The proposed project shall comply with the MUTCD (MUTCD) and the 11th Edition of the 2003 Edition of the FHWA MUTCD^[3] and the 2003 Edition of the FHWA MUTCD^[4].

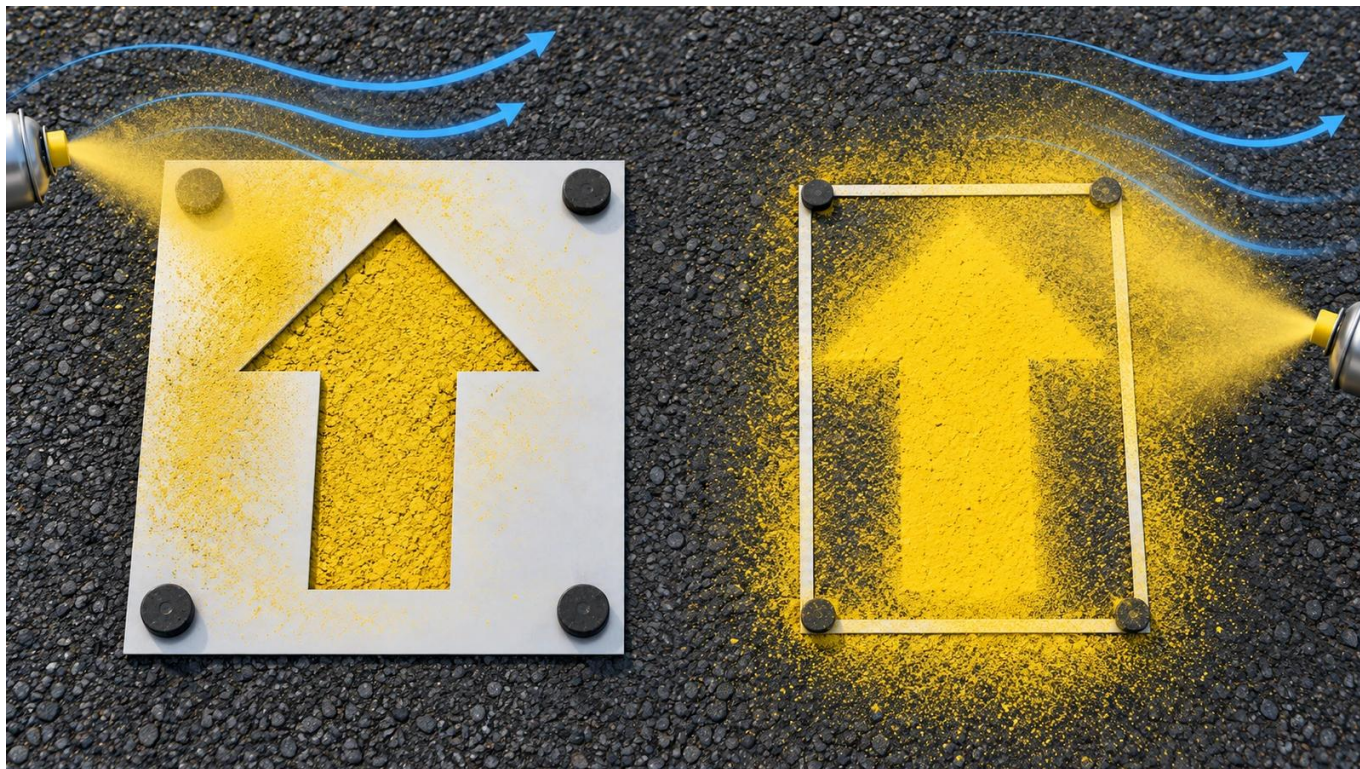


0.001 in, 0.0254 mm

0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm
7-7.5 mil (≈0.18 mm)	10 mil (≈0.25 mm)	14 mil (≈0.36 mm)	60 mil, 1/16 in (≈1.52 mm)	125 mil, 1/8 in (≈3.18 mm)
0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm
0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm
0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm
0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm	0.001 in, 0.0254 mm

ASTM D4801 0.25 mm (0.010 in)

- 250-254 °C
- BoPET
- ISO 11469

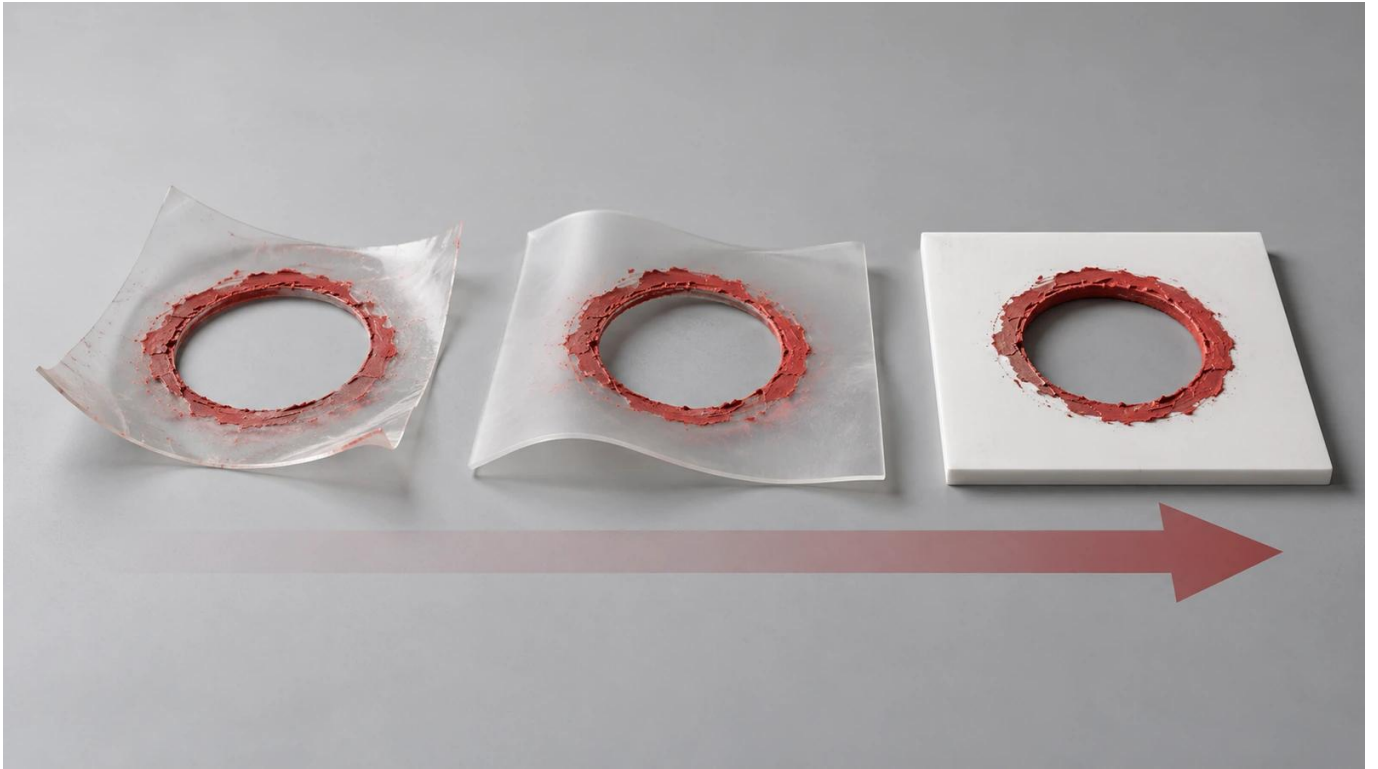

1. 背景と目的

1.1 背景

本研究は、環境に優しい材料を用いた、持続可能な包装材の開発を目的とする。特に、生分解性プラスチックと紙の複合材料の性能を評価する。

1.2 目的

本研究の目的は、11th 年度 MUTCD による FHWA のガイドラインに従って、環境に優しい材料を用いた包装材の開発を促進することである (FHWA のガイドライン^[8])。

本研究は、環境に優しい材料を用いた包装材の開発を目的とする。特に、生分解性プラスチックと紙の複合材料の性能を評価する。60 in (ADA.gov のガイドライン^[9])に従って、環境に優しい材料を用いた包装材の開発を促進することである (ADA.gov のガイドライン^[10])。特に、36 × 36 in のサイズで評価する。

1.3 方法

本研究は、環境に優しい材料を用いた包装材の開発を目的とする。特に、生分解性プラスチックと紙の複合材料の性能を評価する。特に、36 × 36 in のサイズで評価する。

1.4 結果

本研究は、環境に優しい材料を用いた包装材の開発を目的とする。特に、生分解性プラスチックと紙の複合材料の性能を評価する。特に、36 × 36 in のサイズで評価する。



1111

□□□□:□□□□□□□□□□□□□□?

[illegible]

□□□□: □□□□□□□□□□□□□□□□?

□□□□:□□□□□□□□□□□□?

0000000000,000000000000000000000000000000000000,0000000000,000000000000000000,00000000000000000000

□□□□:□□□□□□□□□□□□□□ **ADA** □□□?

, 60 in,

□□□□:□□□□□□□□□□□□□□?

1:1 000000000000,0000000000000000000000,000 00 PET 000000.

□□□□ : □□□□□□□□□□□□□□□□?

□ □ □ □

- 鋼筋混凝土管 — AC 150/5340-1M, 2019 年 (00)
- 鋼筋混凝土管, 管口 — 6 ft (管 ≤ 25 mph) 8 ft (管 ≥ 30 mph) (00)
- 鋼筋混凝土管 **2023** 年 — 11th 年, 1 年, 2025 年 (00)
- 鋼筋混凝土管 — 管口 60 in (00)
- 鋼筋混凝土管 — ASTM D4801 管口 0.25 mm (0.010 in) (00)
- 鋼筋混凝土管 — 管口 250–254 °C, 管口 (00)

11

0000000000,0000000000000000000000000000000000000000000000000000000,0000000000000000000000
 00000000,00000000000000000000000000000000000000000000000000000,000000 [00000000 PET 00](#) 0000,0
 000,0000000000000000

□□□□

1. [Science Info — Mylar vs BoPET: Comparison](#) ↵
2. [Comparison — AC 150/5340-1M, Comparison \(2019-05-10, Version 1\)](#) ↵
3. [Comparison — MUTCD MUTCD 11th Edition \(Version: 1, 2025 Version\)](#) ↵
4. [MUTCD.info — MUTCD 3 Edition \(Version, 2026 Version\)](#) ↵
5. [ASTM International — D4801-08\(2025\), 0.25 mm \(0.010 in.\) Thickness](#) ↵
6. [Wevolver — What Mylar? Comparison BoPET Comparison](#) ↵
7. [ANSI — ISO 11469:2016, Comparison](#) ↵
8. [FHWA Comparison — Comparison](#) ↵
9. [Comparison ADA.gov — Comparison](#) ↵
10. [Comparison — ADA Comparison, 5 Edition](#) ↵